



Product Service

CERTIFICATE

No. B 06 09 18894 036

Holder of Certificate: Kee Klamp Ltd.

1 Boulton Road
Reading
RG2 0NH
UNITED KINGDOM

Certification Mark:



Product:

**Railing system
Guard rail systems KeeGuard II**

The product was tested on a voluntary basis and complies with the following essential requirements. The certification mark shown above can be affixed on the product. The certification mark must not be altered in any way. See also notes overleaf.

Test report no.:

71303281 Rev. 1

H. Heister



Date, 2006-09-27

Page 1 of 2



Product Service

CERTIFICATE

No. B 06 09 18894 036


Model(s): 13374 SK-1 "Un-restrained"
13374 SK-2 "Restrained"

Parameters:	Version:	Un-restrained 13374 SK-1	Restrained 13374 SK-2
Guard rail, height[mm]:	1000	1000	
Edge protection, length [m] between extern. posts:	ca. 6	ca. 6.33	
Number of posts:	6	4	
Length of arms [mm]			
- outer:	ca. 2060	ca. 1175	
- inner:	ca. 2060	ca. 730	
- middle:	ca. 730	-	
Sum of weights [kg]			
- outer:	ca. 73.5	ca. 43.5	
- inner:	ca. 59.0	ca. 14.5	
- middle:	ca. 14.5	-	
Lengths of section [mm]			
- outer:	ca. 500	ca. 2110	
- inner:	ca. 150	-	
- middle:	ca. 2000	ca. 2110	
Space between guard rail [mm]			
- handrail/kneerail:	ca. 452	ca. 452	
- kneerail/bottom:	ca. 452	ca. 452	
	(without board)	(without board)	
Height toe board [mm]:	ca. 150	ca. 150	
Dimnsions of pipes [mm]			
- posts and rails:		Ø 48.3 x 3.25	
- arms:		Ø 42.4 x 3	
Usable for roof angle:		up to 10°	
Used system modules:			
	Version Un-restrained:	Version Restrained:	
	KGU + handrail	KGU + handrail	
	2 x CB5E	2 x CB3F	
	2 x CB4E	2 x CB1	
	2 x CB1		
Used pipe joints: Kee Klamp Fitting type 135-8 and bottom fitting type 130-87.			

Tested according to: DIN EN 13374-5:2004

Production Facility(ies): 46030

Page 2 of 2

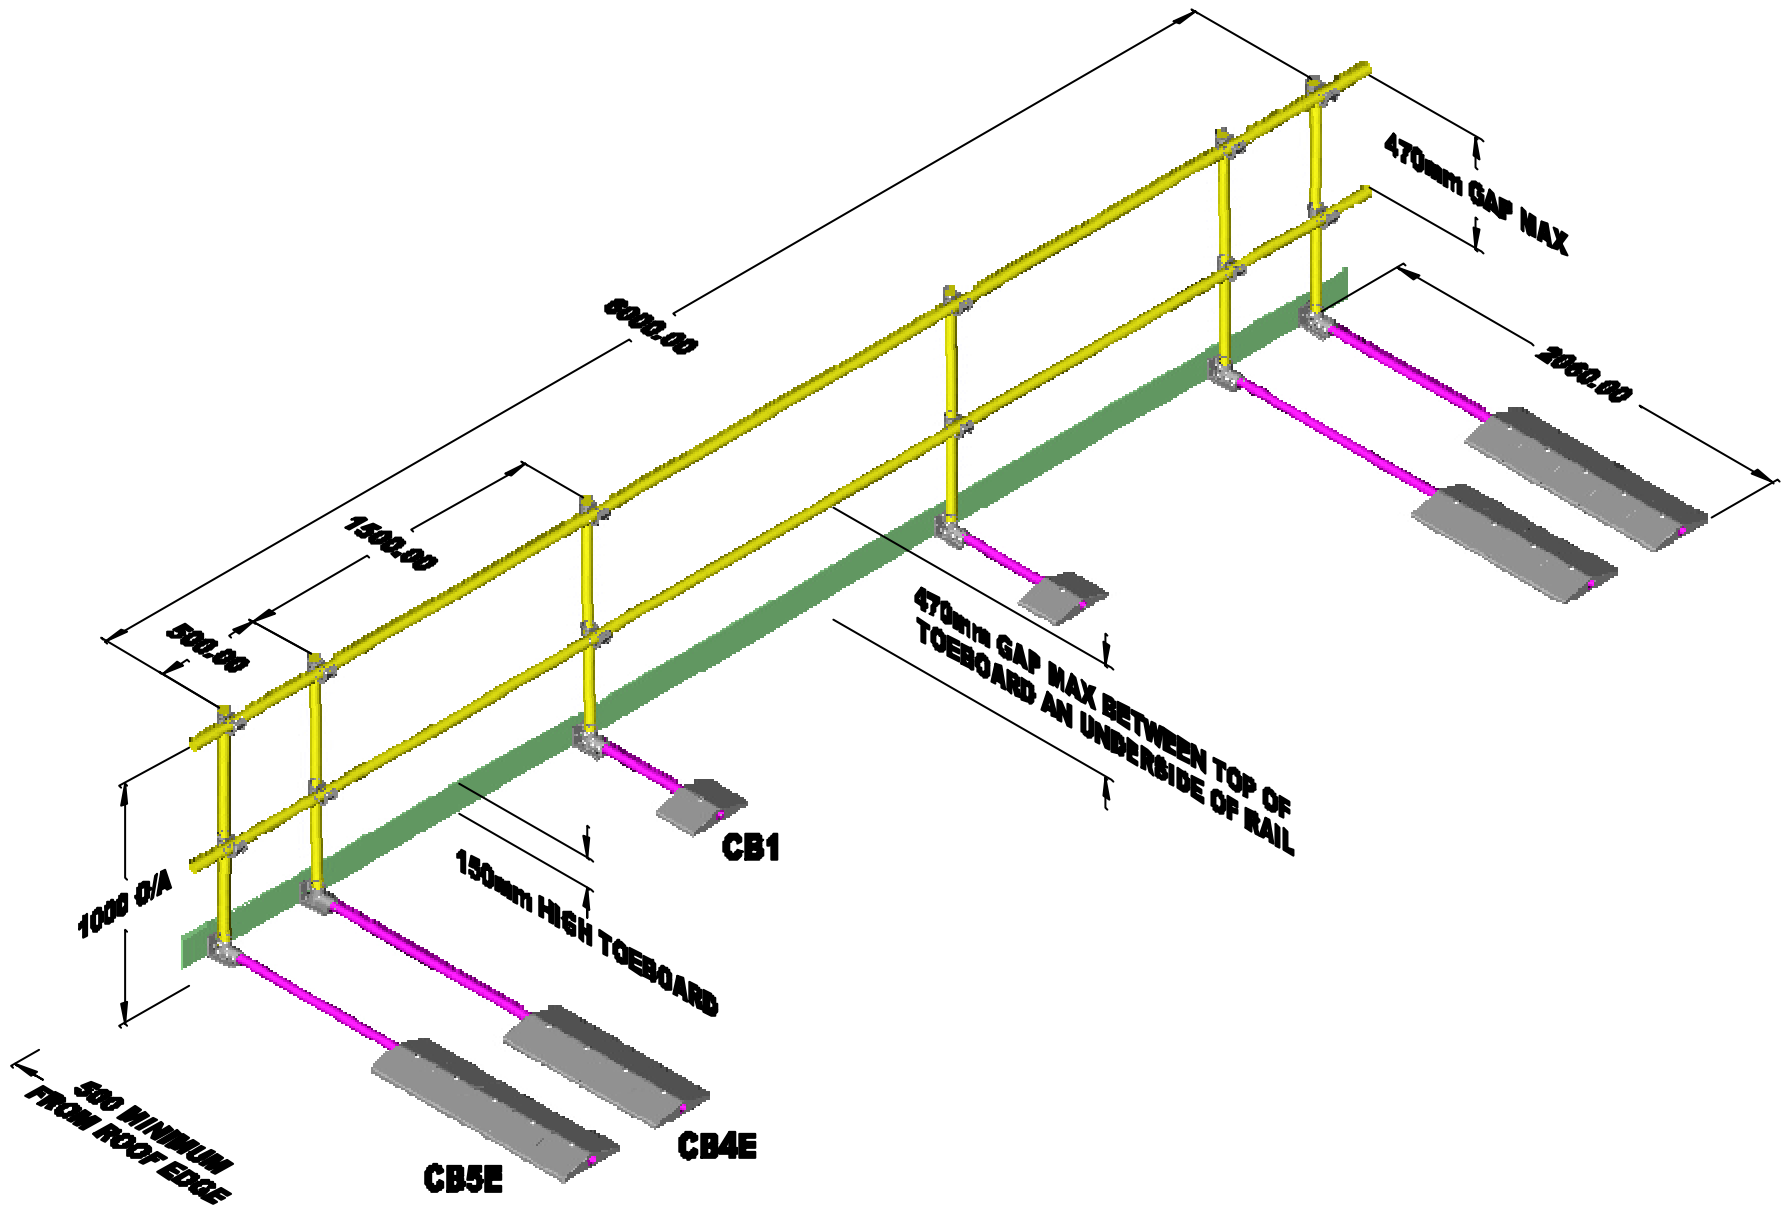

THE ONLY WAY TO GET THE INFORMATION IT CONTAINS IS TO VISIT US AT WWW.KEEGUARD.COM OR TO CONTACT OUR SALES AND SERVICE DEPARTMENT WITHOUT THE NECESSITY OF A PURCHASE ORDER.


Keeguard
 Kee Klamp Ltd,
 1 (Bridgton Road)
 Redditch, Warwickshire, B97 0JH
 Telephone: 01827 801112 Fax: 01827 801114
 E-mail: sales@keeguard.com
 © 2005 Kee Klamp Ltd. All rights reserved.

NOTES:	REVISIONS:
1 ALL DIMENSIONS ARE IN MILLIMETRES	
2 THE SK-1 IS A (G 2,44 (8'00"))	
3 FINISH TO BE VARNISHED AS STANDARD	

KEEGUARD UN-RESTRAINED SYSTEM TO DIN EN 13374

DRAWN	P.M.H.
DATE	08/08
SCALE	N.T.S.
CHECK	
APPROV.	

DRAWING No. 13374 SK-1

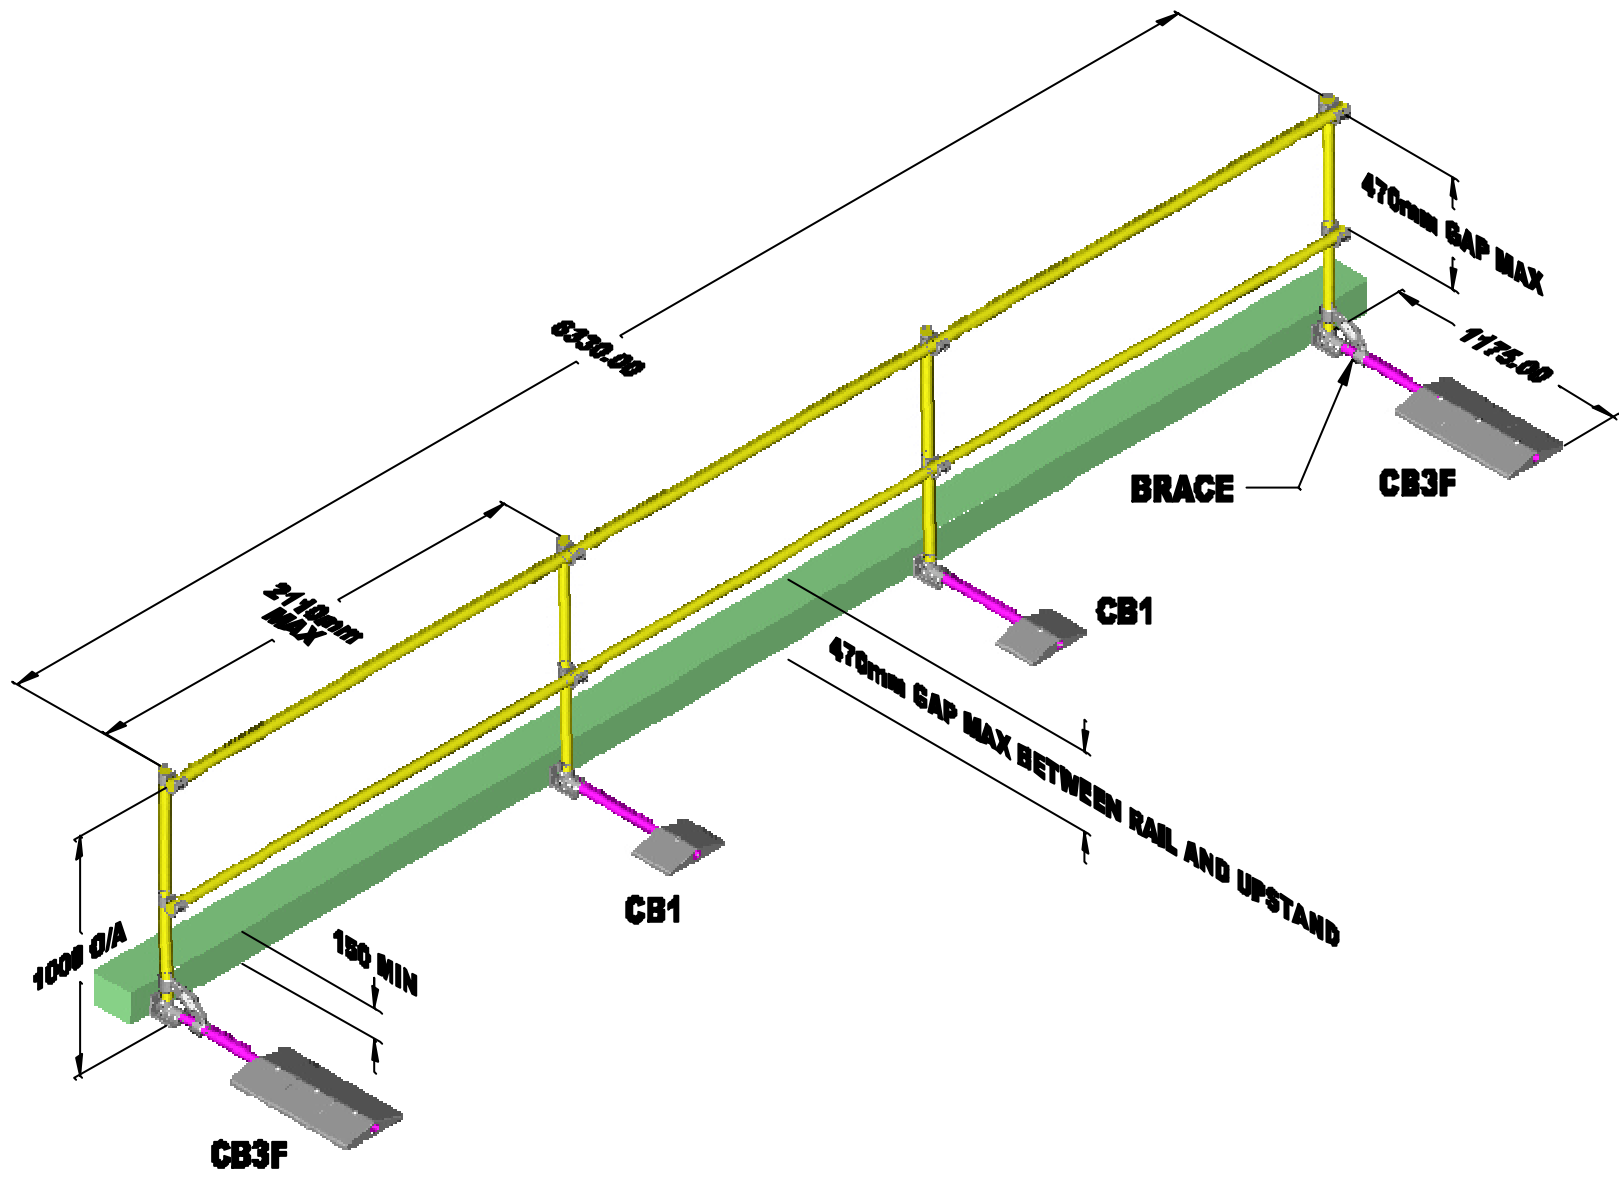

THE ONLY WAY TO GET INFORMATION CONCERNING
 OUR PRODUCTS IS TO CONTACT OUR SALES
 OFFICES OR VISIT OUR WEBSITE



Keeklump Ltd.
 1 (London Road)
 Redhill, Surrey, RH2 0HN
 Telephone: 0181 801 1022 Fax: 0181 801 1149
 Website: www.keeklump.com
 © 2000 Keeklump Ltd. All rights reserved.

NOTES:	REVISIONS:
1 ALL DIMENSIONS ARE IN MILLIMETRES	
2 THE RAIL IS 7.61 (Ø 6.44 (R50D))	
3 FINISH - GALVANISED AS STANDARD	

KEEGUARD RESTRAINED SYSTEM TO EN 13374		DRAWN	PJAH.
		DATE	08/08
		SCALE	N.T.S.
		CHECK	
		APPRO.	
DRAWING No. 13374 SK-2			